


Name: _____
Date: _____
Track: _____

Track Conditions

Size:	Open	Med.	Tight
Traction:	High	Med.	Low
Surface:	Smooth	Med.	Bumpy

Front Suspension

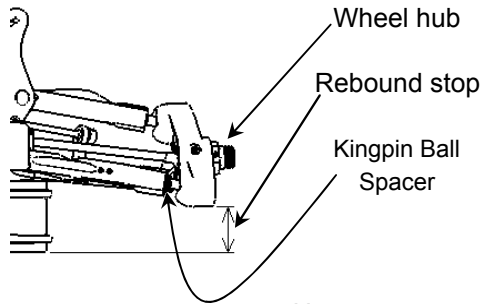


- Kingpin ball spacer _____ mm
- Camber angle _____ °
- Upper arm spacer _____ mm
- Toe angle _____ °
- Rebound stop _____ mm
- Anti-roll bar φ _____ mm
- Wheel Hub _____ mm
- Lower arm mount (Kick up) _____



- Lower arm plate (E0154A)


- Upper arm position (E0148B, E0148C)

- Lower arm spacer _____ mm

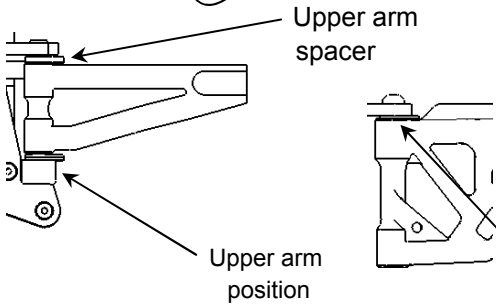

Front Shocks


- Piston _____
- Oil # _____
- Spring _____
- Spring adjustment _____ mm
- Shock position

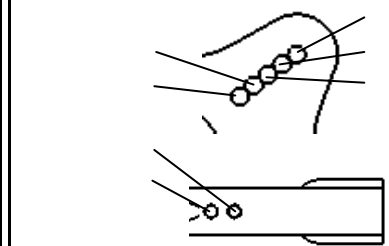

Steering Ackerman





Rear Suspension

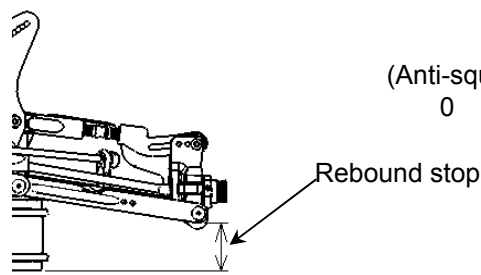

- Camber angle _____ °
- Lower arm mount _____
- (Anti-squat) 0 1
- (Toe angle) _____ °
- Rebound stop _____ mm
- Anti-roll bar φ _____ mm
- Anti-squat (E0111C, E0111D) _____




- Upright E0152
- E0173 (Aluminium)
- Wheelbase adjustment _____ mm

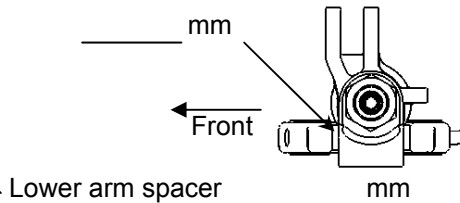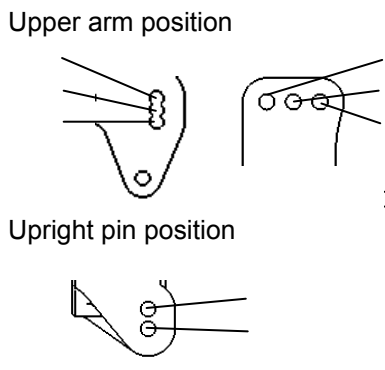


Rear Shocks

- Piston _____
- Oil # _____
- Spring _____
- Spring adjustment _____ mm
- Shock position

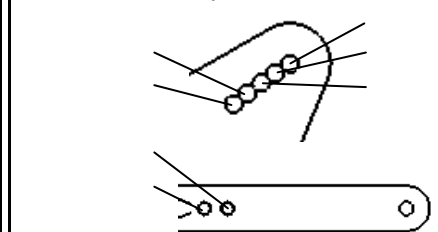

Wing Position



Engine	Type		
Gasket	_____ mm	Reducer	φ _____
Plug	_____	Fuel	_____
Muffler	_____		

Diff. Oil			
Front	# _____	O-Ring	_____ pcs.
Center	# _____		_____ pcs.
Rear	# _____		_____ pcs.

Tire	Front	Rear
Type	_____	Type _____
Foam	_____	Foam _____

Clutch	Clutch shoes	Aluminium _____
		Other _____
	Spring _____ mm	
	Clutch bell / Spur gear	T / T

Result
Race time / Lap _____
Best lap (1Lap) _____

Comments: _____

