


Name: _____
Date: _____
Track: _____

Track Conditions

Size: Open Med. Tight
 Traction: High Med. Low
 Surface: Smooth Med. Bumpy

Front Suspension

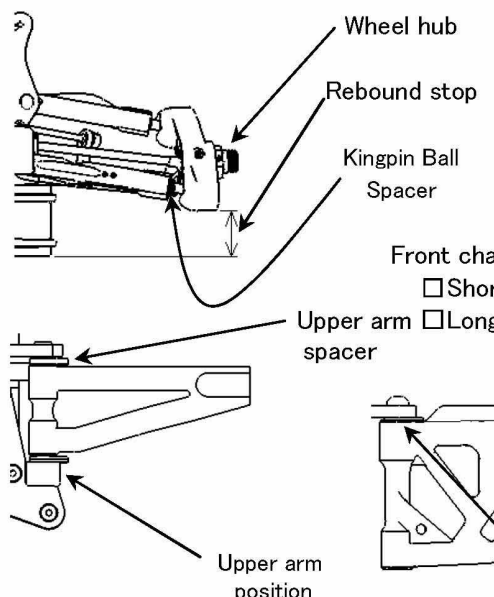


Front ride height _____ mm
 Kingpin ball spacer _____ mm
 Camber angle _____ °
 Upper arm spacer _____ mm
 Toe angle _____ °
 Rebound stop _____ mm
 Anti-roll bar _____ mm
 Wheel Hub _____ mm
 Lower arm mount (Kick up) _____ mm
 Front chassis stiffener 0 1
 Short (Std EU) Long spacer
 Lower arm plate (E0154A)
 Upper arm position (E0148B, E0148C)
 Lower arm spacer _____ mm


Front Shocks

Piston _____
 Oil _____
 Spring _____
 Spring adjustment _____ mm
 Shock position

Steering Ackerman



Rear Suspension

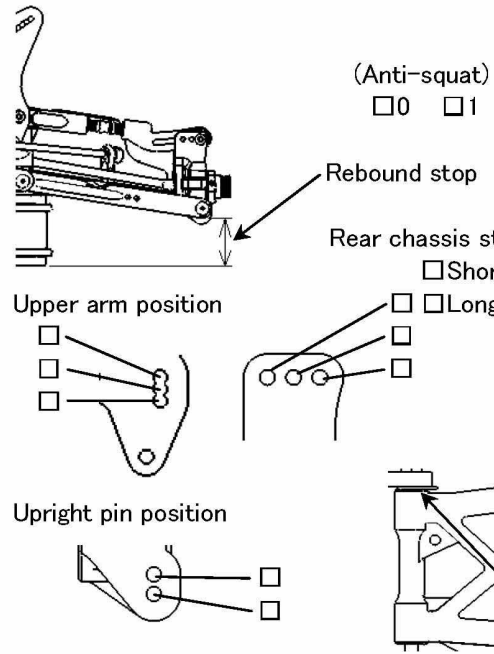


Rear ride height _____ mm
 Camber angle _____ °
 Lower arm mount _____ mm
 (Anti-squat) 0 1 E0185 (Aluminium) (Toe angle) _____ °
 Rebound stop _____ mm
 Anti-roll bar _____ mm
 Rear chassis stiffener Anti-squat (E0111C, E0111D) Short (Ally) Long (Std EU)
 Upright E0152 E0173 (Aluminium)
 Wheelbase adjustment _____ mm
 Lower arm spacer _____ mm

Rear Shocks

Piston _____
 Oil # _____
 Spring _____
 Spring adjustment _____ mm
 Shock position

Wing Position



Engine Type _____
 Gasket _____ mm Reducer _____
 Plug _____ Fuel _____
 Muffler _____

Diff. Oil
 Front # _____ O-Ring ___ pcs. Other _____
 Center # _____ ___ pcs. Other _____
 Rear # _____ ___ pcs. Other _____

Tire
 Front Type _____ Rear Type _____
 Foam _____ Foam _____

Clutch
 Clutch shoes Aluminium _____
 Other _____
 Spring _____ mm
 Clutch bell / Spur gear _____

Result
 Race time / Lap _____
 Best lap (1Lap) _____

Comments:

